



HIGHLY FLEXIBLE MULTI PURPOSE ULTRA PREMIUM FLOOR AND WALL TILE ADHESIVE


BENEFITS

- Interior and Exterior Floor and Wall Application • For Ceramic Tiles, Vitreous/Vitrified, Semi-Vitreous Tiles, Precast Terrazzo, Glass Mosaic Tiles, & Natural Stones.
- Suitable for wet areas like Swimming Pools, Sauna, Water Tanks and Washrooms.
- Suitable for Wet on Wet and Tile on Tile application • Ready to use • Ultimate Bonding • Highly Polymer Modified • Moisture, Shock, Sag & Slump Resistant • Easy to Use • Self Curing • Excellent Coverage • Low Voc

SUBSTRATES

- Concrete • Cement Plaster • Brick Masonry • Cement Terrazzo • All Types of Tiles and Natural Stones
- Cement Board • Calcium Silicate Board • Gypsum Board

SPECIFICATIONS

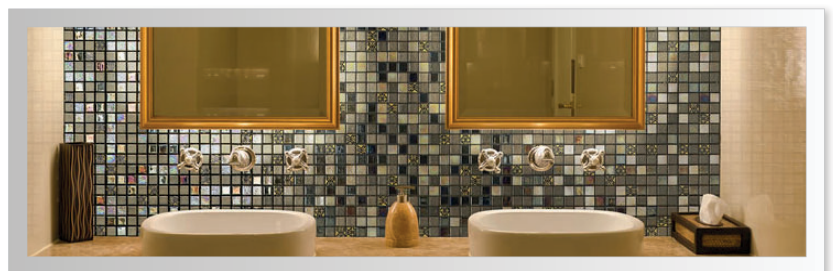

Colour	Grey & White
Class	Exceeds IS 15477:2019 - Type 3 T Adhesive standards.
Coverage	Approx 3 Sqft/Kg for a 3 mm bed thickness using a square notched trowel.
Max Thickness	Upto 12mm
Mixing	5.5 - 6L Water for 20kg of Adhesive
Pot life	4 Hours
Open Time	30 Mins
Adjustment Time	30 Mins
Curing Time	24 Hours
Grouting	After 24 Hours.
Shelf Life	12 Months from the date of Manufacturing.
Packing	1kg, 5kg and 20kg